

J2 H/L 20 - 140s

IP65

Compact actuator for regulation and control of valves. Equipped with extra limit switches (ELS) , manual override. Valve-Interface according ISO 5211/DIN 3337, connectors, heater, electronic limiter.

technical dates

model L

voltage range	24 V AC/DC
current consumption	0,18 A - 2,14 A
operating time s/90°	ca. 120 s

model H

voltage range	85 - 240 V AC/DC
current consumption	0,01 A - 0,28 A
operating time s/90°	ca. 140 s

heater

3,5 W

break torque

25 Nm

operational torque

20 Nm

duty rating [ED]

75%

protection class

IP65

temperature range

-20 °C to 70 °C

flange

F03/F04/F05

double square

9 mm, 11 mm, 14 mm Achtkant

connectors

DIN 43650 ISO 4400 C-192/C-193

housing


polyamide (PA 6)

ELS

5 A 125 V AC / 3 A 250 V AC

optional features

not available for this model

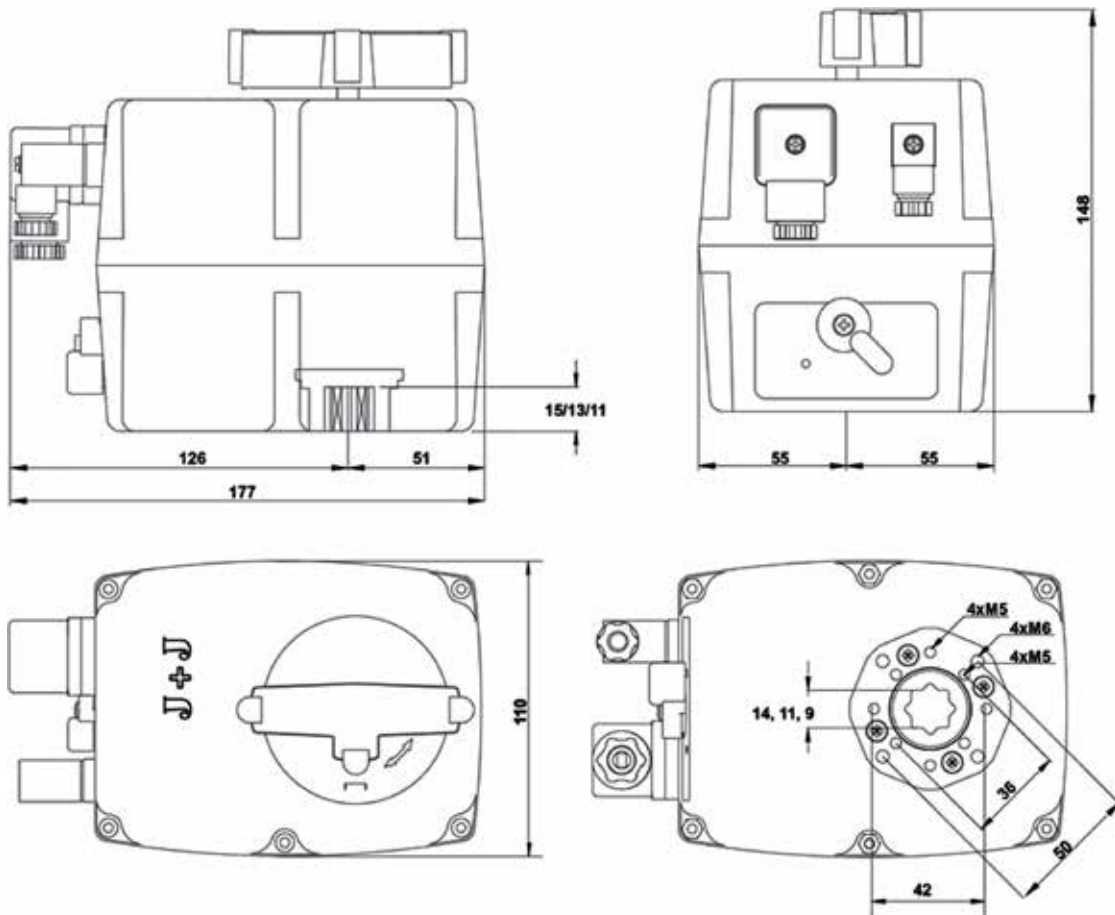

Potentialfreie Endlagen / potentialfree limit switches	
Power Standard AC/DC 2 Punkt Regelung 2 point control	extern external Eingang/Input Ausgang/Output L + Zu/Close Auf/Open Stecker/Plug 4
AC/DC 3 Punkt Regelung 3 point control	intern internal COM COM Stecker/Plug 4
DC 2 Draht 2 wires	