


RE 116

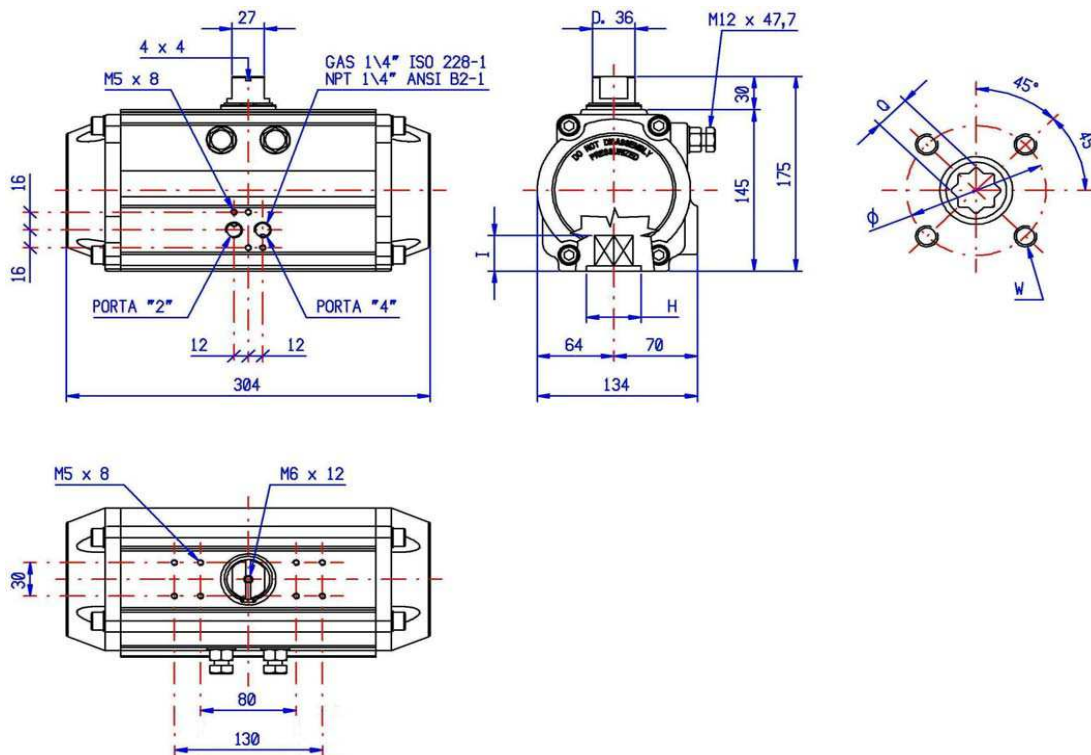

DOUBLE ACTING TORQUE RATINGS (Nm)									
AIR SUPPLY IN BAR									WEIGHT
RE 116	3	4	5	6	7	8	9	10	kg
DA	131,1	174,9	218,6	262,3	306,0	349,7	393,4	437,1	7,280

Spring Return Torque Ratings (Nm)															
RE 116 SR	AIR SUPPLY IN BAR												Torque Springs		WEIGHT kg
	3		4		5		6		7		8		90°	0°	
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°			
SR 3/3	80,7	50,5	124,4	94,2	168,1	137,9	211,8	181,6	255,5	225,3	299,3	269,0	80,7	50,5	7,970
SR 4/4	63,9	23,5	107,6	67,3	151,3	111,0	195,0	154,7	238,7	198,4	282,4	242,1	107,6	67,3	8,200
SR 5/5			90,8	40,4	134,5	84,1	178,2	127,8	221,9	171,5	265,6	215,2	134,5	84,1	8,430
SR 6/6					117,7	57,2	161,4	100,9	205,1	144,6	248,8	188,3	161,4	100,9	8,660

ADDITIONAL DATA

Chamber Diam.	115 mm
MAX.PRESSURE	8 bar
ROTATION	90° ± 5°
VOLUME	2,9 litres
CLOSING TIME	1,0 sek
OPENING TIME	1,0 sek
STD. GREASE	MOLYBDENUM BISULP.

AVAILABLE FORCE INTAKES

F07/10		
ISO 5211	F07	F10
Ø	70	102
W	M 8x12	M 10x15
Q	22	22
I	25	25
H	55	55