


RE 146

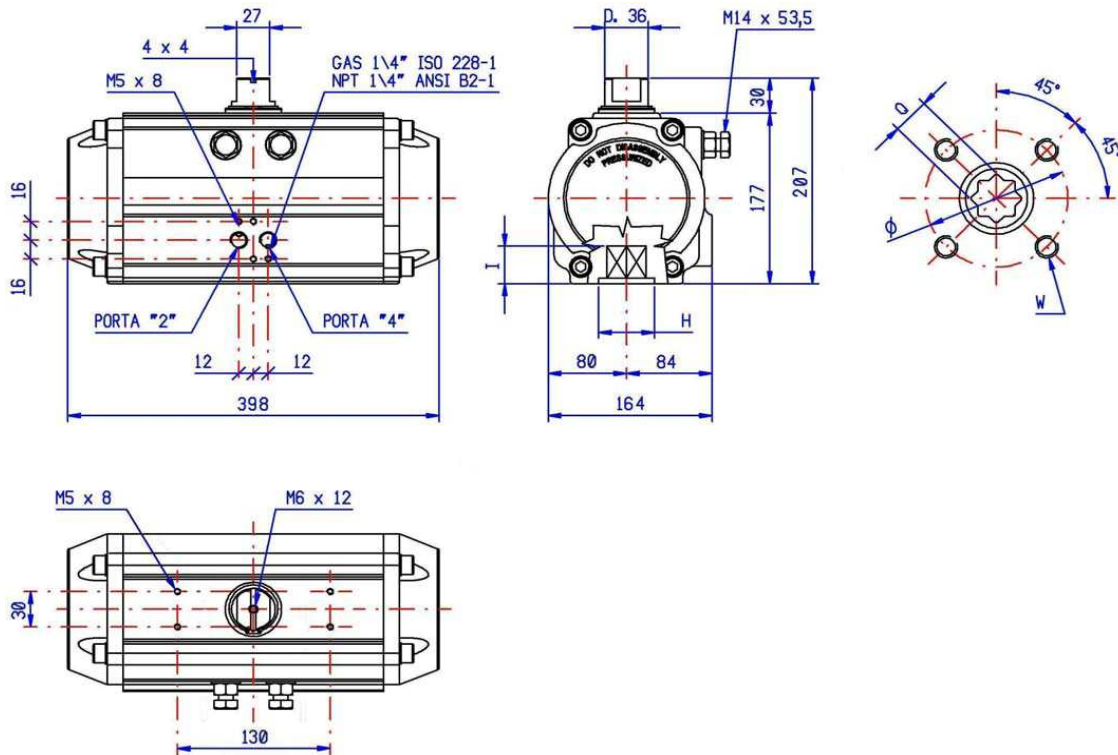

DOUBLE ACTING TORQUE RATINGS (Nm)

AIR SUPPLY IN BAR									WEIGHT
RE 146 DA	3	4	5	6	7	8	9	10	kg
	265,1	353,4	441,8	530,1	618,5	706,9	795,2	883,6	14,850

SPRING RETURN TORQUE RATINGS (Nm)

RE 146 SR	AIR SUPPLY IN BAR												Torque Springs		WEIGHT kg
	3		4		5		6		7		8				
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°	
SR 3/3	162,5	102,6	250,8	190,9	339,2	279,3	427,5	367,7	515,9	456,0	604,3	544,4	162,5	102,6	16,470
SR 4/4	128,3	48,4	216,6	136,8	305,0	225,1	393,3	313,5	481,7	401,9	570,1	490,2	216,6	136,8	17,100
SR 5/5			182,4	82,6	270,8	171,0	359,1	259,3	447,5	347,7	535,9	436,0	270,8	171,0	17,550
SR 6/6					236,6	116,8	324,9	205,2	413,3	293,5	501,7	381,9	325,0	205,2	18,090

ADDITIONAL DATA

Chamber Diam.	145 mm
MAX.PRESSURE	8 bar
ROTATION	90° ± 5°
VOLUME	
CLOSING TIME	1,1 sek
OPENING TIME	1,3 sek
STD. GREASE	SYNTHETIC

AVAILABLE FORCE INTAKES

F10/12				
ISO 5211	F10		F12	
Ø	102		125	
W	M 10x15		M 12x18	
Q	22	27	22	27
I	25	50	25	30
H	70		70	