


RE 241

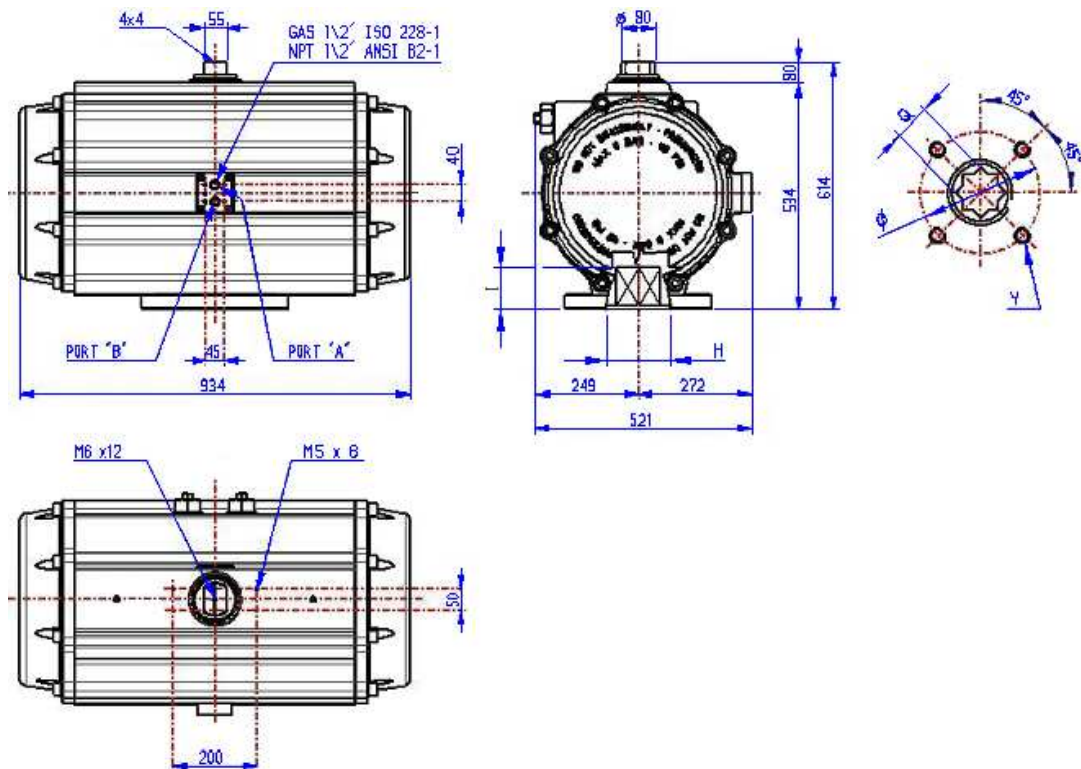

DOUBLE ACTING TORQUE RATINGS (Nm)

AIR SUPPLY IN BAR							WEIGHT kg
RE 241 DA	3	4	5	6	7	8	
	1118,0	1490,0	1863	2235	2608	2980	62,0

SPRING RETURN TORQUE RATINGS (Nm)

RE 241 SR	AIR SUPPLY IN BAR												Torque Springs		WEIGHT kg
	3		4		5		6		7		8				
	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°	
SR 3/3	664,0	453,6	1037,0	826,2	1409,0	1199,0	1782,0	1571,0	2154	1944	2527	2316	664,0	453,6	69,2
SR 4/4			885,4	604,8	1258,0	977,4	1631,0	1350,0	2003	1723	2376	2095	885,4	604,8	71,6
SR 5/5					1107,0	756,0	1479,0	1129,0	1852	1501	2224	1874	1107,0	756,0	74,0
SR 6/6					995,5	534,7	1328,0	907,2	1701	1280	2073	1652	1328,0	907,2	76,4

ADDITIONAL DATA

Chamber Diam.	240 mm
MAX.PRESSURE	8 bar
ROTATION	90° ± 5°
VOLUME	
CLOSING TIME	4,1 sek
OPENING TIME	4,5 sek
STD. GREASE	SYNTHETIC

AVAILABLE FORCE INTAKES

F14 - F16			
ISO 5211	F14		F16
Ø	140		165
W	M 16 x 24		M 20 x 23
Q	36	46	36 46
I	39	50	39 50
H	100		130