



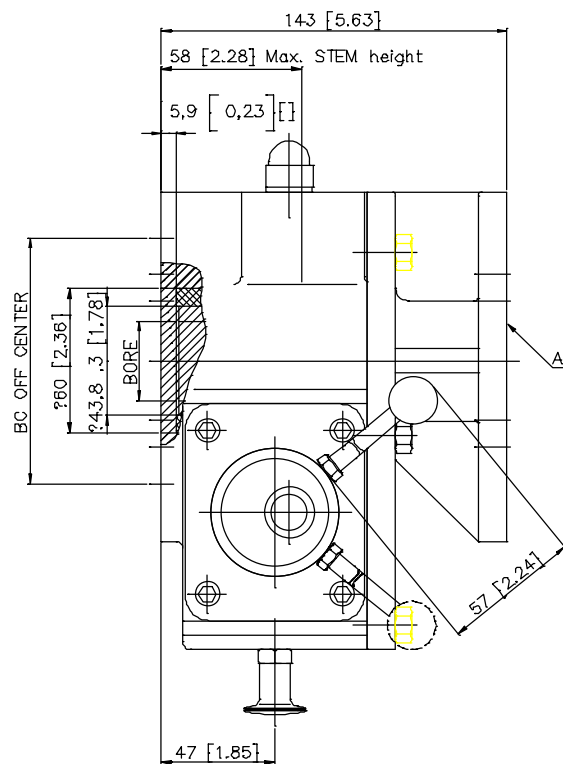

ACTUATOR CONN.
acc.ISO 5211

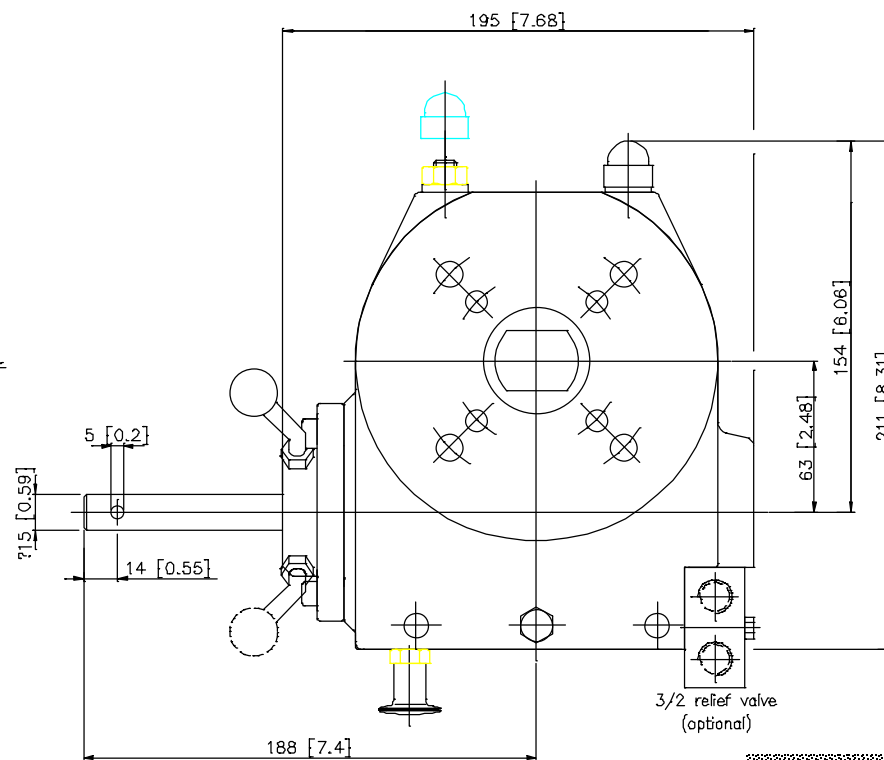

3/2 relief valve
(optional)

DESCRIPTION


Travel : 90 ° At both ends.
Ratio : 46 : 1
Turns to close : 11.5
Weight : 17 kg.(37.7 lb.) Excl.handwheel

MOUNTINGHOLES

Valve connection : F07/F10/F12
MAX. bore : $\varnothing$ 24 [0.94] or $\varnothing$ 30 [1.18]
Actuator connection : F10/F12
MAX. shaft : $\varnothing$ 34 [1.34] or $\varnothing$ 49 [1.92]

TORQUE

max.OUTPUT : 750 Nm (6638 lbf.in.)
max.INPUT : 60 Nm (531 lbf.in.)
M.A. : 12.4 $\pm$ 10%



Dimensions in MM [inch]

J+J Deutschland GmbH
mail: info@jj-deutschland.de
internet: www.jj-deutschland.de

Auf der Hackelmasch 1
D -31061 Alfeld
Tel.: +49 5181 6017
Fax: +49 5181 6032

GEARBOX ILG/D 600

DRAWN : J.H.

d.d. : 06-03-02

DRW.NO. :17 3 11 20

rev.: 01

Contents subject to change without notice.